



# FREEZER - PACK

SELF-SUPPORTING FRAME DOUBLE LEAF AND PRE-CABLING WITH RAPID CONNECTORS

FREEZER - PACK




WITH THE FREEZER PACK DOOR PROVIDES AN EXCEPTIONAL SOLUTION TO SEPERATE TWO AREA'S WITH COMPLETELY DIFFERENT TEMPERATURES, FROM AMBIENT RIGHT DOWN TO -30°C. THE SPECIAL TWIN SILICONE COATED CURTAINS PREVENT CONDENSATION AND ICE BUILD UP WITHOUT THE NEED FOR ADDITIONAL HEATING SYSTEMS. AN EXCEPTIONAL THERMAL BARRIER, FULLY EQUIPPED WITH ALL REQUIRED SAFETY DEVICES.



EN 13241-1:2003 + A1:2011



## STANDARD SPACE REQUIREMENTS

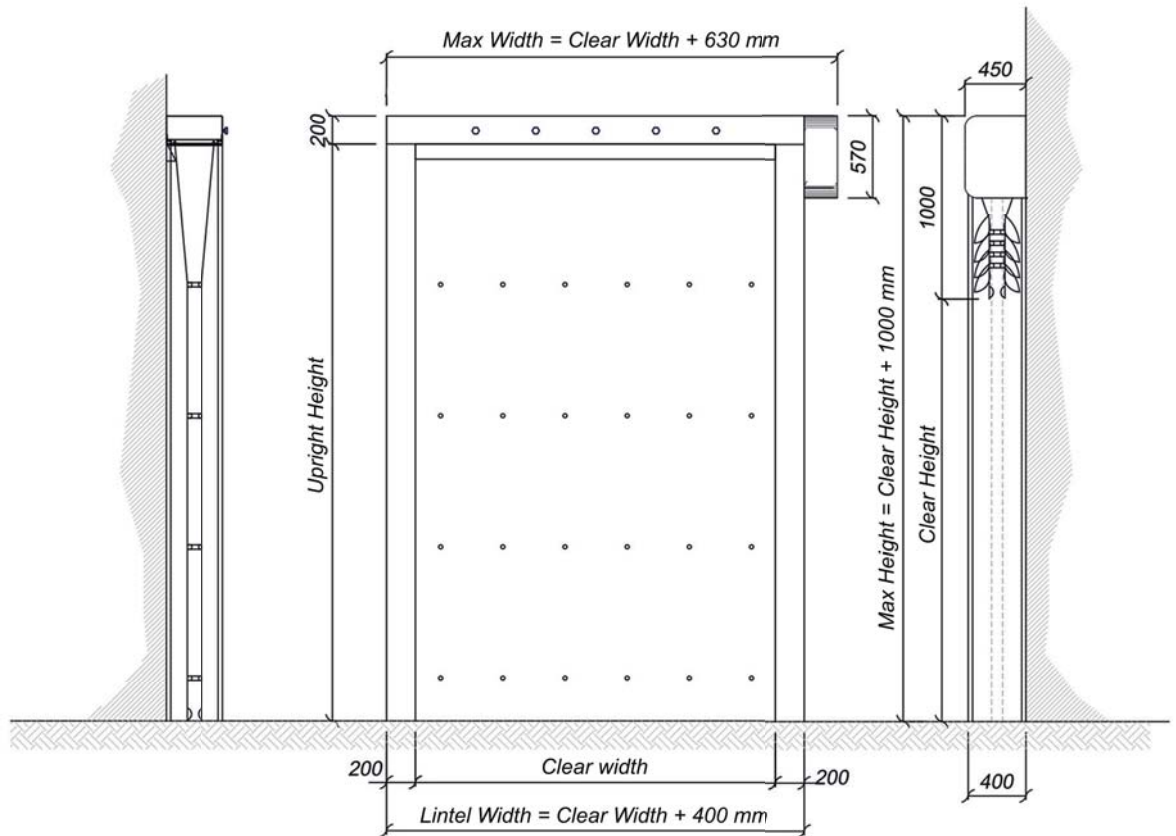

## SPECIFICATIONS

- |                      |  |
|----------------------|--|
| ✓ Frame              | Self-supporting, available in Galvanised steel and Stainless Steel 304/316         |
| ✓ Transverse support | Cladding with double Hollow section for high wind resistance                       |
| ✓ Curtain            | Double Polyester curtain, double coated and self-extinguishing Class II fabric     |
| ✓ Insulation         | Guaranteed by internal air chamber with static air and not ventilated one          |
| ✓ Motor              | Suitable for intensive use and low temperature if required environments up to -30° |
| ✓ Control panel      | 380V, pre-cabled with rapid connectors   |
| ✓ Guides             | Press formed sheet equipped with balancing profiles in fabric material             |
| ✓ Speed              | 0.8 m/s  |
| ✓ Safety             | Optical Barrier 2500mm height  |