

PACK




WITH PACK PROPOSES FLEXIBLE AND DURABLE SOLUTION SUITABLE FOR APPLICATION IN VARIOUS INDUSTRIES. THE HORIZONTAL BARS INSIDE THE CURTAIN GIVE TO THE DOOR EXTREME STRENGTH, ASSURING AN HIGH WIND LOAD RESISTANCE EVEN IF IN PRESENCE OF LARGE OPENINGS.



SELF-SUPPORTING FRAME: MATERIALS AND COLOURS *



DOOR CURTAIN COLOURS

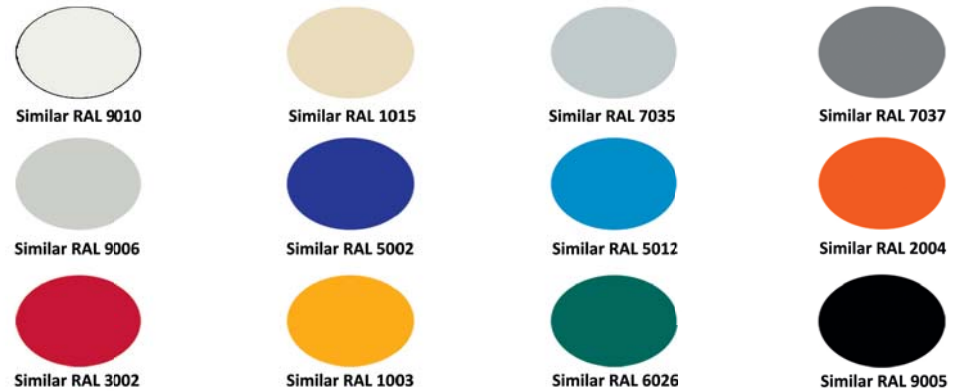

SPECIFICATIONS


- ✓ Frame
 - ✓ Curtain
 - ✓ Motor
 - ✓ Control panel
 - ✓ Guides
 - ✓ Speed
 - ✓ Safety
- Self-supporting frame available in many materials and finishing.
Polyester PVC 1200 g/m², self-extinguishing Class II
Italian made, suitable for intensive use.
380V pre-wiring with rapid connectors
Press formed galvanized sheet equipped with anti-abrasion rubber
1,2 m/s
Wireless safety edge inside bottom edge of the door.

STANDARD WINDOWS

CLEAR OPENING WIDTH	N° OF WINDOWS
2000 - 3550	2
3560 - 4740	3
4750 - 5490	4
5500 - 6490	5
6500 - 7990	6
8000 - 8500	7
8510 - 9990	8
10000 - 10990	9
11000 - 12000	10

Standard window 1200 x 300 mm / 800 x 300 mm in PVC Cristal. Other sizes available upon request.

STANDARD SPACE REQUIREMENTS

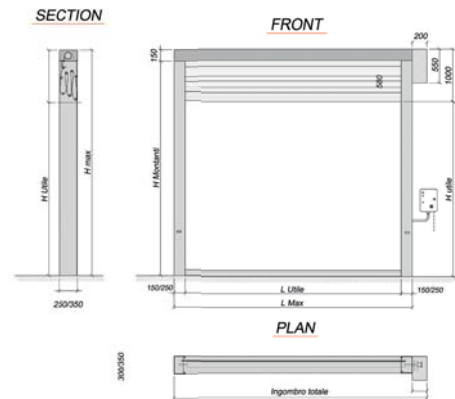

*RAL finishings are available only on Galvanized steel